

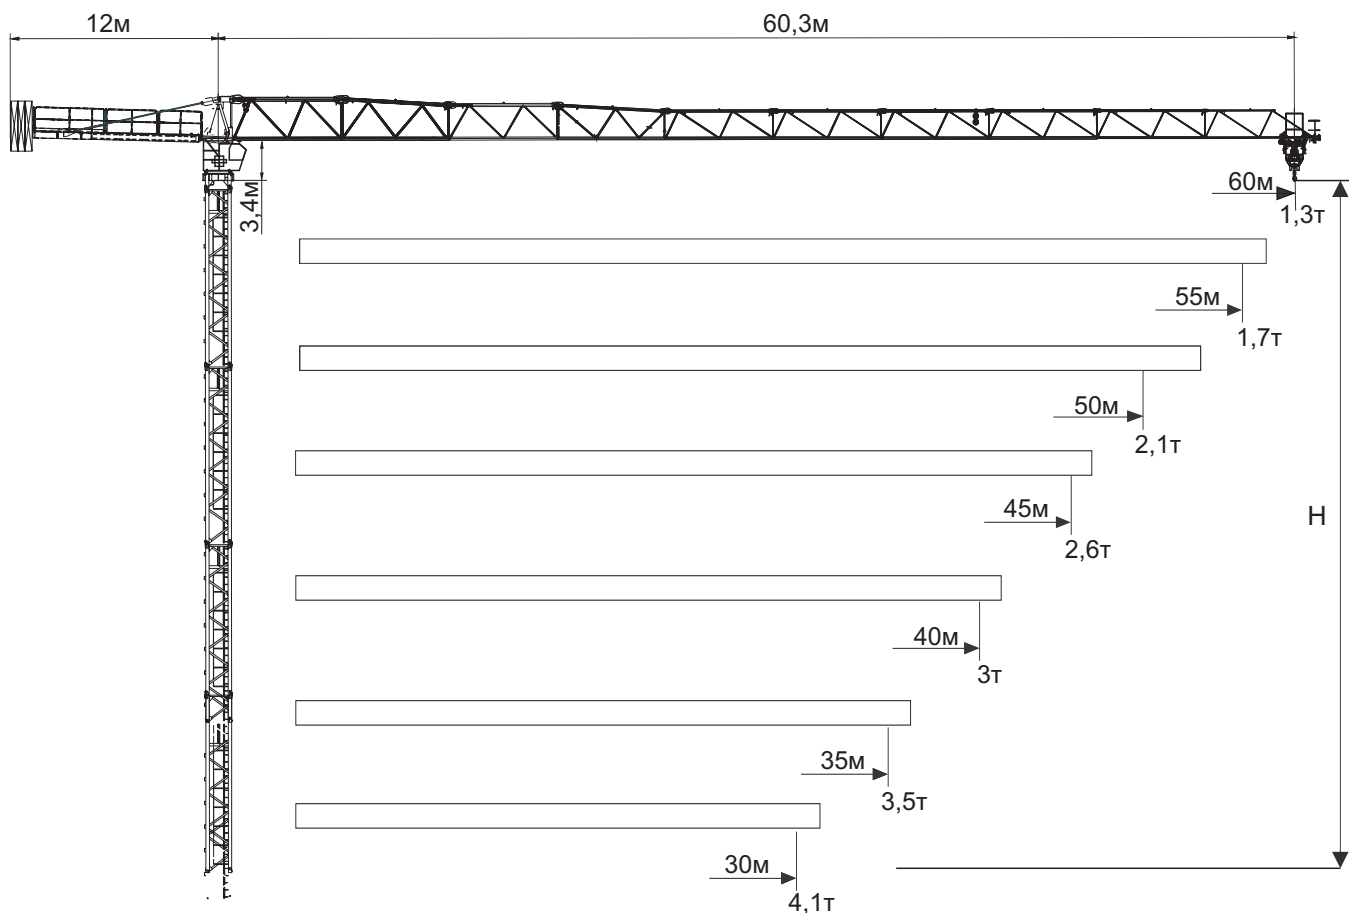
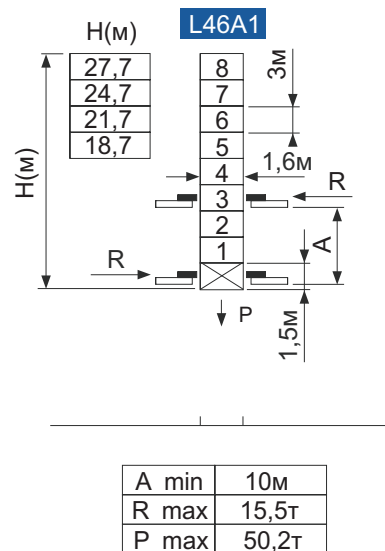


Outline Dimensions

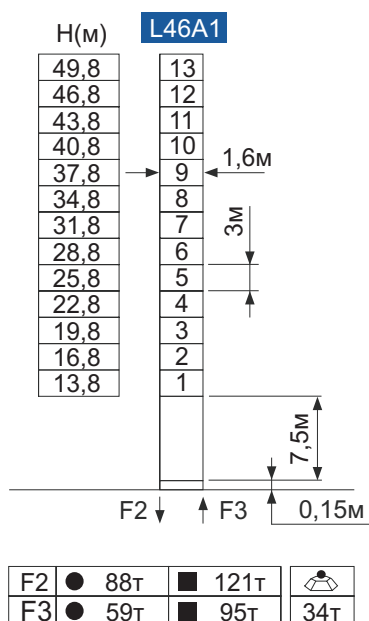

Mast Reactions

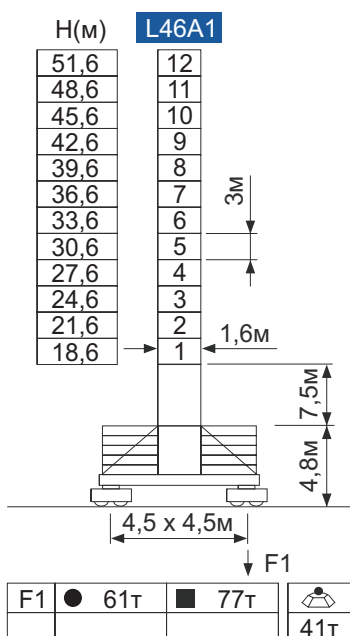

Load Diagrams

		10,00	15,00	18,00	20,00	23,00	25,00	28,00	30,00	35,00	40,00	45,00	50,00	55,00	60,00	M
II	3,00T - 30,44M	3,00	3,00	3,00	3,00	3,00	3,00	3,00	3,00	2,55	2,18	1,88	1,65	1,46	1,30	T
IV	6,00T - 16,28M	6,00	6,00	5,28	4,70	4,02	3,65	3,20	2,95	2,45	2,08	1,78	1,55	1,36	1,20	T

		10,00	15,00	18,00	20,00	23,00	25,00	28,00	30,00	35,00	40,00	45,00	50,00	55,00	M
II	3,00T - 34,21M	3,00	3,00	3,00	3,00	3,00	3,00	3,00	3,00	2,92	2,50	2,17	1,91	1,70	T
IV	6,00T - 18,3M	6,00	6,00	6,00	5,35	4,58	4,17	3,66	3,38	2,82	2,40	2,07	1,81	1,60	T

		10,00	15,00	18,00	20,00	23,00	25,00	28,00	30,00	35,00	40,00	45,00	50,00	M
II	3,00T - 36,96M	3,00	3,00	3,00	3,00	3,00	3,00	3,00	3,00	3,00	2,74	2,38	2,10	T
IV	6,00T - 19,77M	6,00	6,00	6,00	5,83	4,99	4,55	4,00	3,70	3,09	2,64	2,28	2,00	T

		10,00	15,00	18,00	20,00	23,00	25,00	28,00	30,00	35,00	40,00	45,00	M
II	3,00T - 39,79M	3,00	3,00	3,00	3,00	3,00	3,00	3,00	3,00	3,00	2,98	2,60	T
IV	6,00T - 21,28M	6,00	6,00	6,00	6,00	5,42	4,94	4,35	4,03	3,37	2,88	2,50	T


		10,00	15,00	18,00	20,00	23,00	25,00	28,00	30,00	35,00	40,00	M
II	3,00T - 40M	3,00	3,00	3,00	3,00	3,00	3,00	3,00	3,00	3,00	3,00	T
IV	6,00T - 21,4M	6,00	6,00	6,00	6,00	5,45	4,97	4,38	4,05	3,39	2,90	T

		10,00	15,00	18,00	20,00	23,00	25,00	28,00	30,00	35,00	M
II	3,00T - 41,09M	3,00	3,00	3,00	3,00	3,00	3,00	3,00	3,00	3,00	T
IV	6,00T - 21,98M	6,00	6,00	6,00	6,00	5,61	5,12	4,51	4,18	3,50	T

		10,00	15,00	18,00	20,00	23,00	25,00	28,00	30,00	M
II	3,00T - 40,44M	3,00	3,00	3,00	3,00	3,00	3,00	3,00	3,00	T
IV	6,00T - 21,63M	6,00	6,00	6,00	6,00	5,52	5,03	4,43	4,10	T

Anchorage

> 142,8M

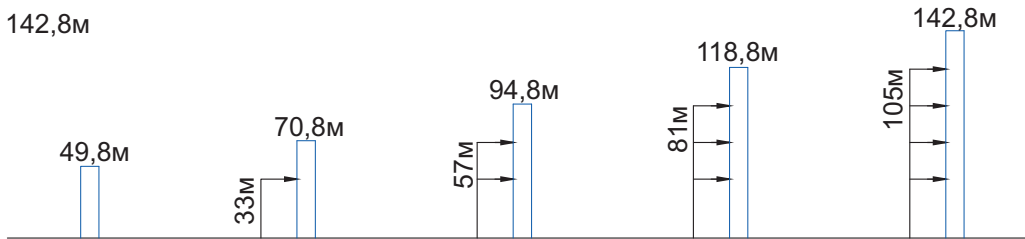

Mechanisms

	Hoisting	30LVF15				
	Speed	m/min	0~40	40~80	0~20	20~40
	Load	T	3	1,5	6	3
	Power	kW	22			

	Trolleying	VR4060		
	Speed	m/min	0~50	
	Power	kW	4	

	Slewing	RVF4		
	Speed	U/min rpm	0~0,8	
	Power	kW	2x4	

380V (±5%)	50Hz	50 kVA	Wire rope 430m
------------	------	--------	----------------